


Reduce Treadmill Noise & Increase Runner Comfort



GoldLine TREADMILL ISOLATION MOUNTS

The noise and impact from Treadmills can travel to other parts of the building where it is heard as unwanted noise.

Exercise mats are either too thin or too stiff to achieve any significant sound and impact reduction.

GoldLine Treadmill Isolation Mounts are 2" thick layered isolation pads made from superior shock damping materials. By combining ultra high performance elastomers with bearing plates, outstanding isolation values are achieved for the most problematic equipment.

- HIGH ISOLATION EFFICIENCIES • GREATER RUNNER COMFORT
- REDUCES OR ELIMINATES NOISE TRANSFER TO OTHER AREAS IN THE BUILDING

PRODUCT DATA




Standard Thickness 2"

Standard Sizes 5" x 18" - Front Mounts
5" x 7" - Rear Mounts
Front mount has retaining edge.

Load Allowance Front not to exceed 450 lbs. ea.
Rear not to exceed 175 lbs. ea.

**The AcoustiGuard GoldLine Mounts are sold by the set - 2 front and 2 rear pads.
Both top and bottom surfaces on the mounts are slip resistant.**

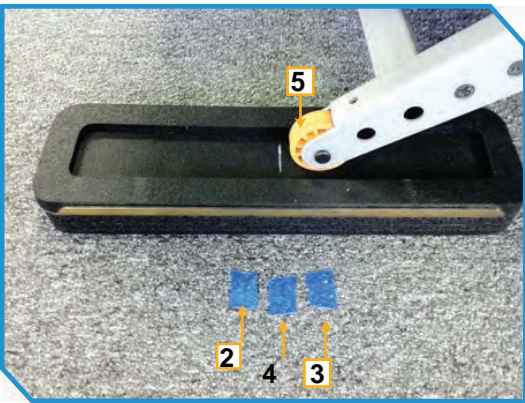

The floor under the Treadmill should be free & clear of debris.

1. Place the Treadmill at the lowest incline height.
2. Using masking tape, mark the floor at that mount inset location.
3. Raise the Treadmill to the highest incline setting, and mark the floor at that wheel location with another piece of tape.
4. Measure between the 2 marks, and place third piece of tape at the center line between 2 marks.
5. Install the Treadmill Mount, so that the middle of the mount (indicated) is aligned with the center (middle) piece of tape.
6. Now place the rear mounts directly under the rear feet and ensure that they are centered.

Should there be any questions, please contact the manufacturer at 1-888-625-8944

IMPORTANT NOTICE



Buyers / Owners / Users of the 'Treadmill Mounts' assume full responsibility for the safe installation, use, and regular daily inspections. Mount alignment with the equipment is **EXTREMELY IMPORTANT!** Regular inspection and adjustments are strongly recommended!

Users of these products are entirely responsible for determining the suitability for their installation, application and compliance with any legal provisions, including, but not limited to, those relating to health and safety. AcustiGuard Wilrep Ltd. assumes no liability whatsoever in connection with the purchase, installation, use or misuse of these products.

Without limiting or affecting the foregoing (above) product liability notice ("IMPORTANT NOTICE"), Wilrep Ltd. warrants that the "Treadmill Mounts" to be free of manufacturing defects for a period of 12 months. Wilrep Ltd. will replace (upon satisfactory proof of purchase from Wilrep Ltd.), any components which in Wilrep Ltd's sole discretion are inherently faulty due to product/manufacturing defects only.

The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary. Suggested applications may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications.