


DAP

Decorative Absorption Panels

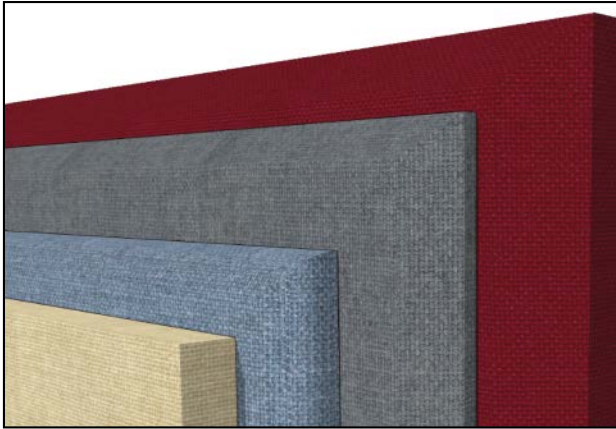

The **Decorative Absorption Panels (DAP)** is an attractive, versatile rigid fiberglass panel that can be used for a wide variety of acoustic applications.

Panels are available in 1" or 2" thicknesses and are available in any size up to 48" x 96". Custom sizes shapes and thickness are also available.


All fabric facing is Guilford of Maine™ FR701, Class-A fire rated and is available in over 50 colors. Embossed and perforated vinyls are also available.

Resin edge hardening is optional and recommended for increased durability of the panel sides and corners.


Typical wall installation methods include; Hook & Loop fabric fasteners, Z-clips or RotoFast™ – all of which are invisible after the panels are installed.

A variety of horizontal hanging options are also available for ceiling "cloud" applications including; aircraft aluminum wire for suspension from drywall, beams or truss.


EDGE PROFILE

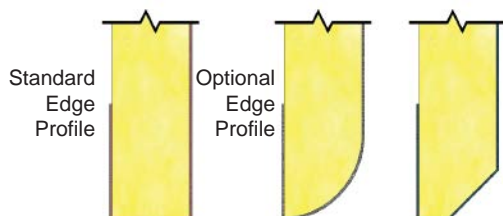

CROSS SECTION DETAIL

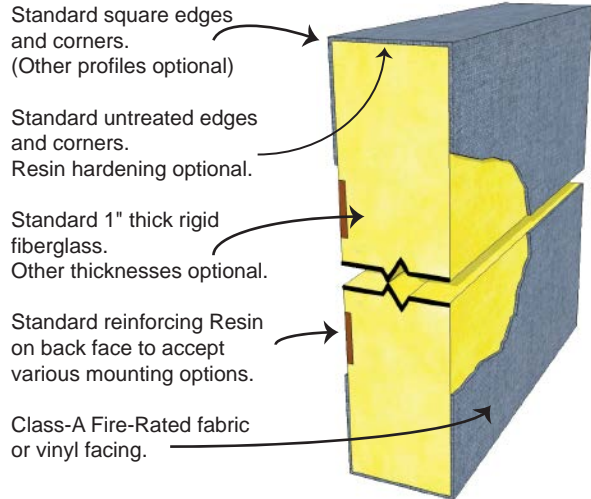

TYPICAL PANEL INSTALLATION

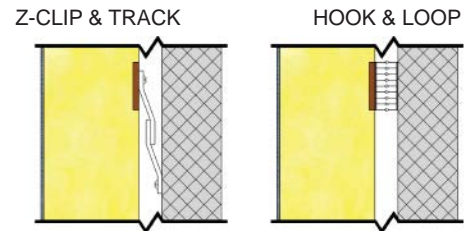

Z-Clips and Hook strips factory installed on reinforcing resins.

Z-Tracks and Loop strips supplied.

PERFORMANCE DATA - (Absorption Coefficient)

Frequency in (Hz)	1-in. thick Fibre glass Fabric Finish	1-in. thick Fibre glass Vinyl Finish 18%
250	0.333	0.302
500	0.687	0.648
1000	0.955	0.842
2000	1.094	1.053
4000	0.877	0.854
NRC	0.75	0.75

FLAMMABILITY

DAP Fabric and Vinyl finish panels are CLASS-A non-combustible as defined by ASTM E-84.